

11-30-2001 21:00

11-30-2001 21:00

(2)

中華民國專利公報 (17)(12)

(11) 公告號: 330411

(14) 中華民國 87 年 (1008) 04 月 21 日

發明

全 5 頁

(31) 101. C 1 : A1107/11

(34) 6 頁: 圖 1 至 圖 6

(21) 申請案號: 80210000

(22) 申請日: 中華民國 80 年 (1991) 07 月 03 日

(72) 發明人:

謝國雄
謝國雄

台北國科學院路四十八之十六號
芬蘭路廿四號四十二號

(71) 申請人:

謝國雄
謝國雄

台北國科學院路四十八之十六號
芬蘭路廿四號四十二號

(73) 代理人: 張其文 吳其

1

2

[57] 申請專利範圍:

1. 一種電動牙刷之改良, 包括:

一中空刷柄, 具有一握部、一頭部、及

一連接該握部與該頭部的頸部; 該頭

部有一圓形齒孔與一四方形齒孔, 且該

頸部有一可通供應元件;

一尾端具有一凸出部, 由該凸出部供應元

件供給電流;

一在該尾端凸出部內, 由該尾端之凸出

部凸出而產生一往復旋轉運動;

一齒棒, 固設在該刷柄之頭部, 其下端

由該往復旋轉運動以元因, 而使該齒

棒在該頭部產生定向之往復旋轉

運動, 且該齒棒之上端伸入該刷柄之頭

部;

一四方形刷頭, 置入該刷柄頭部之四方

形齒孔中, 其外緣有刷毛, 內設有一半

圓柱狀口, 俾上下端各以同一條線相

在該四方形齒孔中, 且該口下方有一

底斜面, 俾與上述齒棒之上端相抵而

該齒棒上端作往復運動, 使該刷頭之

外

緣隨之往復運動。

2. 如申請專利範圍第 1 項所述之電動牙刷

之改良, 其中還包括:

一圓柱狀之往復旋轉刷頭, 供套入該

刷柄頭部之四方形齒孔中, 其外緣有刷毛

, 內設有一齒心孔;

上述四方形刷頭上端具有一以動棒, 俾

能入該往復旋轉刷頭之齒心孔中, 俾

齒棒在往復旋轉運動產生往復運動。

10. 3. 如申請專利範圍第 1 項所述之電動牙刷

之改良, 其中上述四方形刷頭具有一卡扣

俾供一咬位口結合。

4. 如申請專利範圍第 2 項所述之電動牙刷

之改良, 其中上述四方形刷頭具有一卡扣

俾供一咬位口結合。

15. 5. 如申請專利範圍第 3 項或第 4 項所述之

電動牙刷之改良, 其中上述咬位口具有一

斜向槽俾供上述齒棒上端抵靠及運動。

6. 如申請專利範圍第 1 項所述之電動牙刷

之改良, 其中上述刷柄之頭部內有一緊


20.

D (2)


(3)

第五圖可配合第一圖及第四圖實施。
 係在第一圖之可充電電池時，得
 吸取外部電源供電。

第六圖類似於第五圖，但顯示另一
 利用感應磁場方式供電設計。

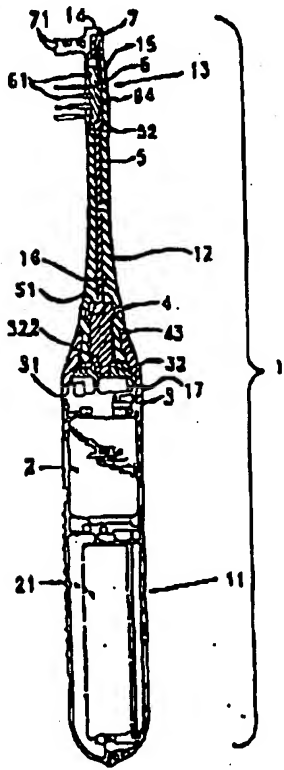


第一圖

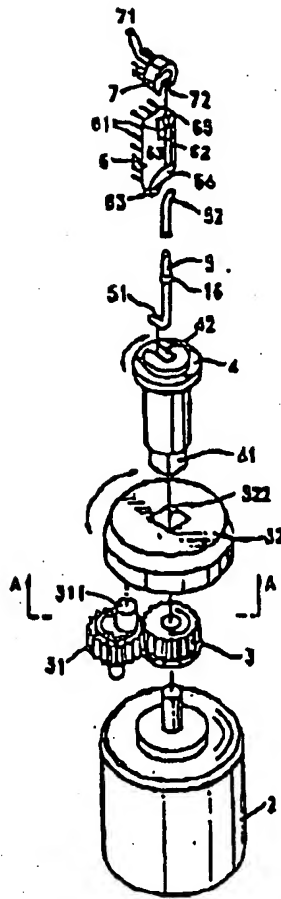


第二圖

D (2)

(4)

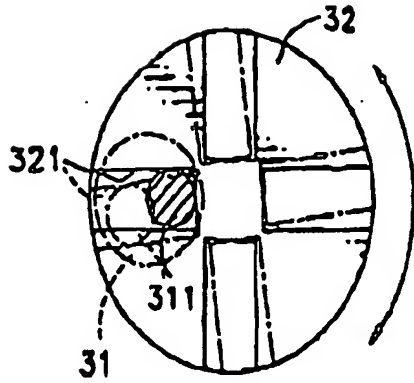


第三圖

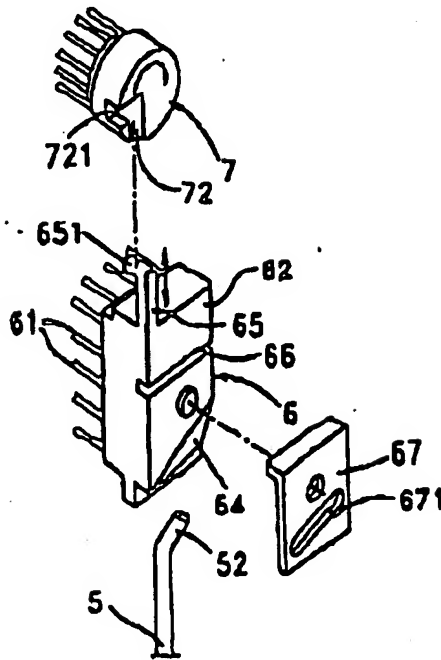

第四圖


D (2)

(3)

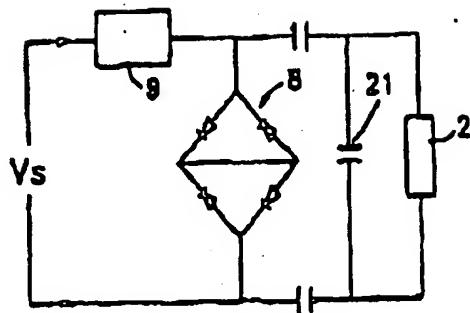

第五圖

D

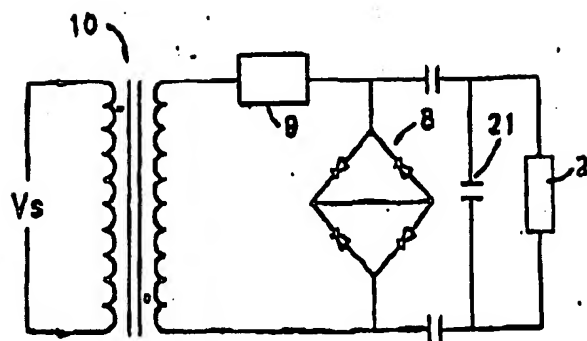

第六圖

PATENT JOURNAL OF THE REPUBLIC OF CHINA
PUBLICATION NO. 330411

Int. Cl. (illegible): A (illegible) G 17/14
Filing No.: 8(illegible)210(illegible)
Filing Date: July 3, 1997
Publication Date: April 21, 1998
Total of 5 pages

IMPROVEMENTS TO AN ELECTRIC TOOTHBRUSH

Inventors: (Names omitted)
No. 16, 18 (illegible) Taipei
No. 12, (illegible)
Applicants: (Names omitted)
No. 16, 18 (illegible) Taipei
No. 12, (illegible)
Agent: Mr. (illegible) Wen

Claims

1. Improvements to an electric toothbrush, which include:

a hollow brush handle that is comprised of a handle part, a head part and a neck part that connects said handle part and said head part; said head part is provided with a round base opening and a square base opening and said handle part is equipped with an electrical power supply component;

a motor, equipped with an output shaft, for which an electric current is provided by said electrical power supply component;

a reciprocating rotational drive unit, which is driven by the output shaft of said motor and which causes a reciprocating rotational movement;

a swing arm, which is installed in the neck part of said brush handle, the lower end of which is driven by the reciprocating rotational drive unit such that said swing arm makes a reciprocating rotational movement within a certain angle in the (illegible) direction around the (illegible) part, and the upper end of which extends into the head part of said brush handle;

a square brush head which fits into the square base opening in the head part of said brush handle, the outer periphery of which is provided with bristles and the inner periphery being a semicircular column, and the upper and lower edges are fixed along the same axial line inside said square base opening; underneath said inner periphery there is a slanted base surface that is in contact with the upper end of said swing arm and makes a reciprocating movement by means of the upper end of said swing arm, thereby causing the outer periphery of said brush head make a similar reciprocating movement.

2. Improvements to an electric toothbrush in accordance with Claim 1, which also include:

a cylindrical brush head capable of reciprocating rotation is provided for insertion into the round base opening in the head of said brush handle, bristles are provided on its outer periphery, and an eccentric slot hole is provided at its inner periphery;

the upper end of said square brush head is equipped with a driving arm capable of reciprocating rotation that can be inserted into the eccentric slot hole of said brush head such that said brush head capable of reciprocating rotation is made to move in a reciprocating manner.

3. Improvements to an electric toothbrush in accordance with Claim 1, in which said square brush head is equipped with a holding slot used for joining with a repositioning piece.

4. Improvements to an electric toothbrush in accordance with Claim 2, in which said square brush head is equipped with a holding slot used for joining with a repositioning piece.

5. Improvements to an electric toothbrush in accordance with Claim 3 or 4, in which said repositioning piece is equipped with a slanted slot for use by the upper end of said arm to [illegible] and move.

6. Improvements to an electric toothbrush in accordance with Claim 1, in which a waterproof seal that is in tight contact with said arm is provided inside the head of said brush handle.

7. Improvements to an electric toothbrush in accordance with Claim 1, in which a matching set of connectors is provided for the upper end of said handle part and a waterproof packing is provided between said set of connectors and the lower end of said neck part.

8. Improvements to an electric toothbrush in accordance with Claim 1 or 2, in which the slanted bottom surface of said square brush head slants downwards in the direction from said inner periphery to said outer periphery, and a driving arm is positioned immediately above and behind said inner periphery.

9. Improvements to an electric toothbrush in accordance with Claim 8, in which said inner periphery slants from its right side towards its left side, and a driving arm is positioned above one side of said inner periphery.

a group of coil circuits that are used to generate excitation current and that are placed inside the handle part of said brush handle;

an electric charger, inside of which there is a power supply cord that is used to input electricity from an outside power source and several groups of electromagnets that are arranged for various polarities and sizes, and that excite the coil circuits placed inside the charger;

a rectifier for rectification of the electric current input from the outside source such that electrical safety is maintained.

18. Improvements to an electric toothbrush in accordance with Claim 17, in which said electrical power supply unit further comprises a protection device such that the rechargeable battery is not overcharged.

19. Improvements to an electric toothbrush in accordance with Claim 18, in which said protection device is a relay device.

Brief description of the figures

Figure 1 is a view of an application example of the improvements to an electric toothbrush of the present invention.

Figure 2 is an exploded oblique view of the main parts inside the hollow brush handle of the present invention shown in Figure 1.

Figure 3 is a view of Figure 2 along the line A-A.

Figure 4 is similar to Figure 2 except that it shows another application example.

Figure 5 can apply to either Figure 1 or Figure 4 and when the battery in Figure 1 is a rechargeable battery, an outside power source is used to supply electricity.

Figure 6 is similar to Figure 5 except that it shows another design using inductive excitation.

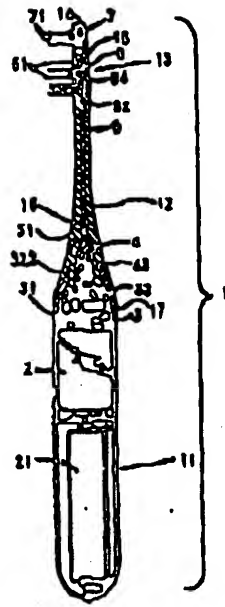


Figure 1

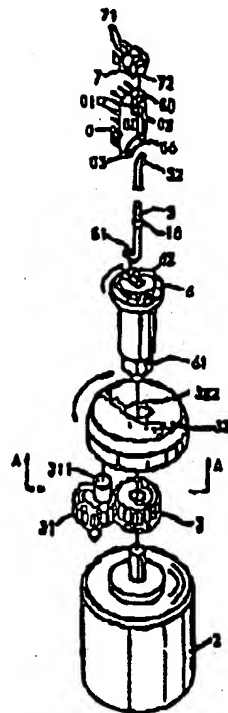


Figure 2




Figure 3

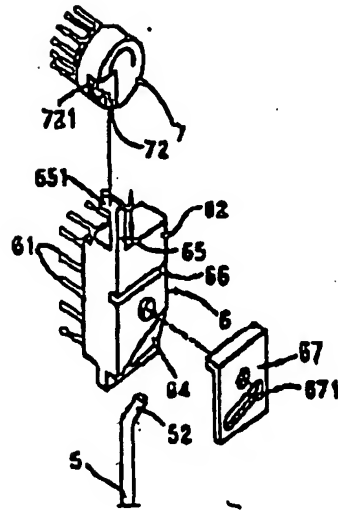


Figure 4

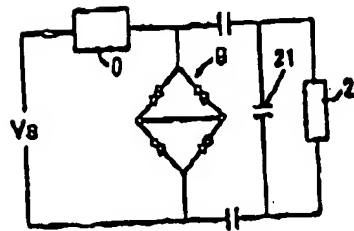


Figure 5

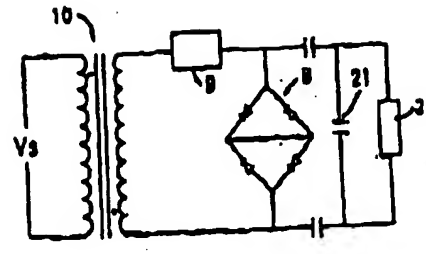


Figure 6

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

BEST AVAILABLE COPY